



Investment Proposal (Quote)

RDO Equipment Co.
20 Iowa Avenue
Riverside CA, 92507
Phone: (951) 778-3700 - Fax: (951) 778-3746



WARNING

**Warning: Cancer and
Reproductive Harm.**

For more information go to:
www.P65Warnings.ca.gov

Proposal for:
CITY OF LAKE ELSINORE
130 S MAIN ST
LAKE ELSINORE, CA, 925304163
RIVERSIDE

Investment Proposal Date: 8/2/2022
Pricing Valid Until: 12/30/2022
Deal Number: 1578416
Customer Account#: 3124004
Sales Professional: Steve Wren
Phone: (951) 778-3700
Fax: (909) 428-4800
Email: SWren@rdoequipment.com

Comments

SOURCEWELL CONTRACT # 031721-VRM

Equipment Information

| Quantity | Serial Number Stock Number | Hours (approx.) | Status / Year / Make / Model Additional Items | Cash Price |
|---------------------|-------------------------------|--------------------|--|--------------|
| 1 | TBD TBD | 0 | New 2022 VERMEER S925TX | \$38,862.00 |
| | | | Freight in SOURCEWELL FRT AND PREP | \$1,021.00 |
| | | | Customer Discount SOURCEWELL | (\$3,842.00) |
| 1 | TBD TBD | 0 | New 2022 PALADIN BRANDS(ATI,BRADCO,MCMILLEN,THE MSSA405 | \$2,563.42 |
| 1 | TBD TBD | | New 2022 VERMEER STR48 TRENCHER | \$3,505.10 |
| | | | Inside Parts BOOM AND CHAIN | \$3,915.00 |
| 1 | TBD TBD | | New 2022 PALADIN BRANDS(ATI,BRADCO,MCMILLEN,THE 18" AUGER BIT | \$738.40 |
| 1 | TBD TBD | | New 2022 PALADIN BRANDS(ATI,BRADCO,MCMILLEN,THE 24" AGER BIT | \$783.06 |
| Equipment Subtotal: | | | | \$47,545.98 |

Purchase Order Totals

| | |
|------------------|-------------|
| Balance: | \$47,545.98 |
| CA STATE TAX: | \$2,852.76 |
| CA COUNTY TAX: | \$118.86 |
| CA CITY TAX: | \$475.46 |
| CA SPECIAL TAX: | \$713.19 |
| Sales Tax Total: | \$4,160.27 |
| Sub Total: | \$51,706.25 |
| Cash with Order: | \$0.00 |
| Balance Due: | \$51,706.25 |


Equipment Options

| Qty | Serial Number | Year / Make / Model | Description |
|-----|---------------|--|---|
| 1 | TBD | 2022 VERMEER S925TX | MSSA104 BERLON HD LOW PROFILE BUCKET - 36" WIDE S925TX11VP S925TX VALUE PACKAGE - DOMESTIC (25HP DIESEL 7"TX) |
| 1 | TBD | 2022 PALADIN BRANDS(ATI,BRADCO,MCMILLEN,T HE MSSA405 | MSSA405 **AUGER DRIVE - HIGH TORQUE (B 24348) |
| 1 | TBD | 2022 VERMEER STR48 TRENCHER | MSSA500 TRENCHER ATTACHMENT - STR48 |
| 1 | TBD | 2022 PALADIN BRANDS(ATI,BRADCO,MCMILLEN,T HE 18" AUGER BIT | MSSA435 18" AUGER BIT |
| 1 | TBD | 2022 PALADIN BRANDS(ATI,BRADCO,MCMILLEN,T HE 24" AGER BIT | MSSA440 24" AUGER BIT |

S925TX MINI SKID STEER



BUILT TO PERFORM. Get more out of each day with a tipping capacity of 2643 lb (1198.8 kg) and rated operating capacity of 925 lb (419.6 kg) while reaching to maximum hinge pin height at 84.5" (214.6 cm).

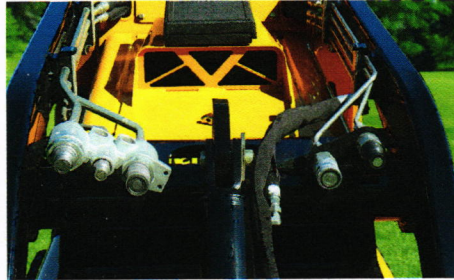

HYDRAULIC BOOST. The S925tx comes standard with a dual hydraulic auxiliary system with high flow to power the most demanding attachments and a low flow to give the operator maximum control.



ADAPT TO THE CHALLENGE. With a universal mounting plate, option of 7" (17.8 cm) or 9" (22.9 cm) tracks and multiple engine options to choose from, the S925tx has the options to help increase productivity on the job.



SERVICEABILITY. Stay productive on the job with accessible service points. The S925tx also offers simple hose routings and ease of access to the fuse panel for maximum efficiency.




OPERATOR COMFORT. Enjoy the ride with a chariot-style platform for operational comfort and pilot-operated ground drive to help you maintain smooth control on the worksite and in tight areas.



REST ASSURED. The 3-year/3000 hour extended limited warranty on the loader arms gives operators peace of mind on the job site.



VERMEER.COM

Vermeer

**EQUIPPED TO
DO MORE.**

S925TX MINI SKID STEER

GENERAL

Length with standard bucket: 106" (269.2 cm)
Length without standard bucket: 84" (213.4 cm)
Width with standard bucket (7" [17.8 cm] tracks): 42" (106.7 cm)
Width without standard bucket (7" [17.8 cm] tracks): 36" (91.4 cm)
Width with standard bucket (9" [22.8 cm] tracks): 42" (106.7 cm)
Width without standard bucket (9" [22.8 cm] tracks): 40" (101.6 cm)
Height: 58" (147.3 cm)
Height (to hinge pin): 84.5" (214.6 cm)
Ground clearance: 6" (15.2 cm)
Bucket rollback at ground level standard bucket: 33°
Dump angle at max pin height standard bucket: 26°
Reach of standard bucket at full height: 22.87" (58.1 cm)
Width with standard bucket (9" [22.8 cm] tracks): 3465 lb (1571.7 kg)
Weight with no bucket, (9" [22.8 cm] tracks, diesel engine): 3350 lb (1519.5 kg)

ENGINE OPTION ONE

Make and model: Kubota V1505
Fuel type: Diesel
Fuel tank capacity: 13 gal (49.2 L)
Gross horsepower: 24.5 hp (18.3 kW)
Cooling system: Liquid
Max angle of inclination: 30°
Hydraulic system flow: 12 gpm (45.4 L/min)

ENGINE OPTION TWO (INTERNATIONAL ONLY)

Make and model: Kubota V1505
Fuel type: Diesel
Fuel tank capacity: 13 gal (49.2 L)
Gross horsepower: 35.1 hp (26.2 kW)
Cooling system: Liquid
Max angle of inclination: 30°
Hydraulic system flow: 15.5 gpm (58.7 L/min)

ENGINE OPTION THREE

Make and model: Kubota WG1605
Fuel type: Gas
Fuel tank capacity: 13 gal (49.2 L)
Gross horsepower: 40 hp (29.9 kW)
Cooling system: Liquid
Max angle of inclination: 30°
Hydraulic system flow: 15.5 gpm (58.7 L/min)

TRACK PERFORMANCE

Rated operating capacity (SAE): 925 lb (419.6 kg)
Tipping capacity (with 165 lb [74.84 kg] operator): 2643 lb (1198.9 kg)
Travel speed (fwd/rev): 4.5 mph (7.3 km/h)/3.0 mph (4.8 km/h)
Ground pressure (7" [17.8 cm] tracks /9" [22.8 cm] tracks): 5 psi/4 psi (.4 bar/.3 bar)

OPERATIONAL

Steering: Duel axis, pilot-operated joystick
Lift: Duel axis, common bucket lever
Curl: Duel axis, common bucket lever