



28374 FELIX VALDEZ AVE
TEMECULA, CA 92590
OFFICE# 951-676-5751
FAX# 951-699-5297

QUOTE



NAME: CITY OF LAKE ELSINORE
LUIS CEJA

PHONE: 951-805-9927 FAX:
CELL:
EMAIL: LCEJA@LAKE-ELSINORE.ORG

DATE: 10/28/22
QUOTE: 3801
SALESMAN: CHARLES
PO:
VALIDITY: 30 DAYS
LEAD TIME FROM ORDER: TBD
F.O.B. TEMECULA

QTY	DESCRIPTION	UNIT PRICE	AMOUNT
1	LAND PRIDE 20' ROTARY CUTTER MDL - RC5020-2-03123243607591 20' ROTARY CUTTER - 540 rpm Double Front Chain Guard 6 ea. Laminated Tires, Dual Axle Constant Velocity Input Driveline, Cat. 6 Double Rear Chain Guard No Deck Rings Performance Hitch	\$45,788.00	SOURCEWELL \$32,967.36
		SUBTOTAL	\$32,967.36
		DELIVERY	\$350.00
		LABOR	\$0.00
		8.75% TAX	\$2,915.27
		DOWN	\$0.00
		INSURANCE	\$0.00
		TOTAL	\$36,232.63

Sign: _____ Date: _____

Print Name: _____ Title: _____

PRICE SUBJECT TO CHANGE

RC5020-2 20' FOLDING ROTARY CUTTERS

HP REQUIRED
90-250 HP

CUTTING CAPACITY
3"

HITCH
Pull-Type




Be more productive, 20' at a time.

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for this 20' cutter. Wing decks float independently, and follow the contour of the land leaving an even cut. The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications. An optional baffle and shredder kit with adjustable spacing is available for crop shredding.

7 YEAR
LIMITED GEARBOX
WARRANTY


Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex uphill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.

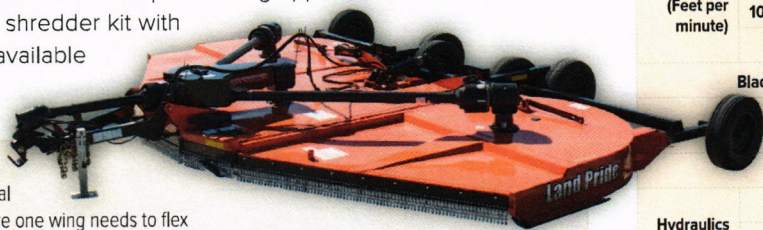

The optional LP Performance Hitch is self-leveling and swivels up and down, and rotates side to side for uneven terrain.



The diamond blade carrier handles most cutting conditions and leaves a cleaner cut.



The dishpan option assists the blade carrier in passing over obstructions that could damage the blade carrier.

	RC5020-2 HEAVY DUTY
Horsepower	90-250 HP
Hitch	Pull-Type; Standard Clevis, Swivel, Ball, Pintle, or Bar-Tite Hitch
Working Width (cm)	20' (607)
Overall Width	20' 9-1/2"
Min. Transport Width	8' 9"
Overall Length	19' 3"
Machine Weight - lb (kg)	6,528 (2,961)
Cutting Height *	2" - 14"
Cutting Capacity	3" Diameter
Tongue Weight - lb	2,300
Max. Turning Angle	80° with CV
Deck Thickness	10 Gauge
Deck Height	10-1/2"
Suspension	Spring Cushioned Center Axle
Deck Rings	Optional
Side Thickness	1/4"
Chain Guards Front & Rear	Single - Standard Double - Optional
Skid Shoes	Wings and Center, Reversible, Replaceable, Beveled
Blades	1/2" x 4" High Lift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 Center
	17,377 fpm
	Wings
	17,329 fpm
1000 Center	18,165 fpm
	Wings
	18,317 fpm
Blade Overlap	6"
Dishpan	1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan
Baffle Kit	Optional - Rear
Hydraulics	Wings
	3-1/2" x 12"
	Center
	4" x 8"
Gearbox Rating ^A	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Cat. 6 CV
Connecting Drivelines	Cat. 5 Slip Clutch
Tires 6 or 8	21" Laminated, 29" Used Aircraft, or 27" Foam-Filled
Transport Lights	Standard
Colors	

*Maximum cut height is dependent on tire options selected.